

TECHNICAL DATASHEET

2900

(Activator / accelerator for anaerobic curing adhesives and sealants)

Description

Kisling 2900 is a low-viscosity activator, specifically formulated for our modified acrylic adhesives for bonding sheets into stator or rotor packages. The catalytically active component is dissolved in isopropanol.

Kisling 2900 accelerates the curing of adhesives and is recommended wherever rapid curing is required.

Advantages

- Very fast curing
- Short evaporation time

Physical properties (liquid product)

Chemical base	Organometallic compound (solved in Isopropanol)
Colour	Turquoise (blue-green)
Viscosity (25°C; Brookfield RVT; Spindle 2; 100rpm)	~ 10 mPa·s
Density bei 25 °C	~ 0.8 g/cm ³
Shelf life	1 year (at room temperature)
Flash point	13 °C
Evaporation time	60 – 120 seconds at 25°C


Curing properties

Fixture time
depending on the anaerobic adhesive
Functional time
depending on the anaerobic adhesive
Final strength
depending on the anaerobic adhesive

15 – 30 seconds

20 – 40 minutes

12 hours

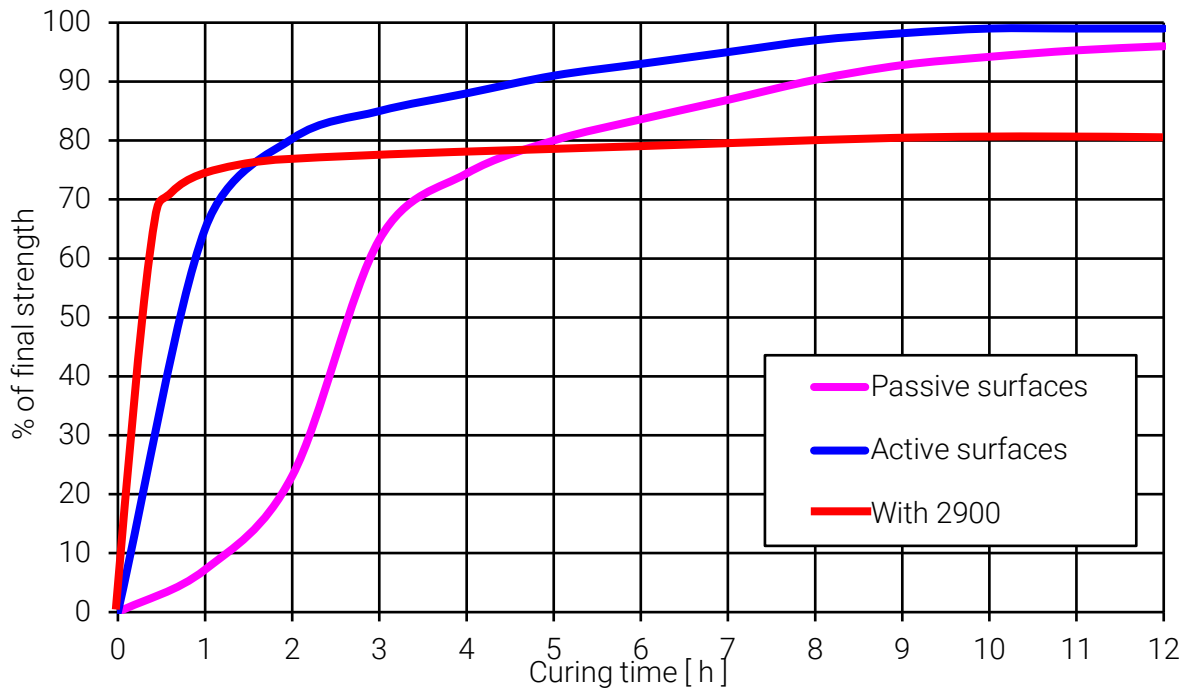

Note: The use of the activator reduces the final strength of the adhesive used by up to 20% compared to the ideal values.

Instruction for use

- Apply 2900 to one surface and the adhesive to the other. To be able to bridge larger gaps, 2900 can also be applied out on both sides.
- The activator must evaporate completely so that the adhesive is not impaired in wetting and curing.
- The components should be joined together immediately if possible.
- Fix the joined parts for at least 2 minutes (please check your specific application for the correct fixture time).
- Store the parts until the functional or final strength is reached.

Warning!

Never mix bigger amount of adhesive and activator directly!

Precautions

For your own safety, please refer to the information of the concerned MSDS and for the correct handling the "user instructions".

WARRANTY INFORMATION - PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that KISLING products are safe, effective, and fully satisfactory for the intended end use. KISLING sole warranty is that the product will meet the KISLING sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. KISLING specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. Unless KISLING provides you with a specific, duly signed endorsement of fitness for use, KISLING disclaims liability for any incidental or consequential damages. Suggestions of uses should not be taken as inducements to infringe any particular patent.

TIS_2900_e/OT/30.04.2024